


PRS 600.3

Three-phase Portable Reference Standard and Power Quality Analyzer

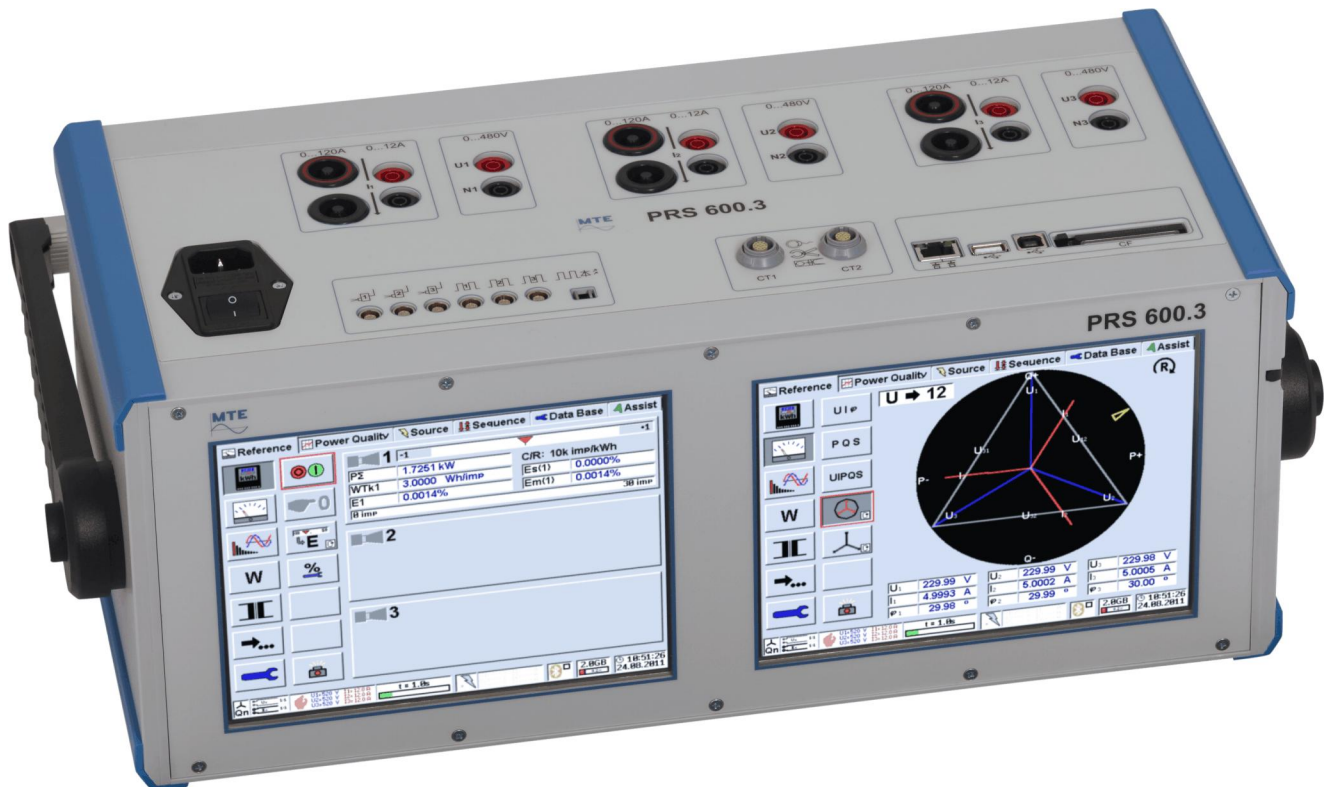

The PRS 600.3 is a combination of a three-phase Portable Reference Standard of class 0.02% and an IEC 61000-4-30 Class A compatible Power Quality Analyzer with 3 voltage and 3 current channels. The device is equipped with two 8.4" colour TFT VGA displays based on touch screen operation. The Reference Standard is used to test single and three phase meters, instrument transformers and installations on site.

The Power Quality Analyzer is used to resolve disputes at contractual applications, for statistical surveys, including EN 50160 reporting, and for online troubleshooting of different kind of power quality problems.

The unit can be used with various types of clamp-on CTs and current and voltage sensors. Therefore it is possible to easily and accurately test both CT/PT and direct connected meters.

Advantages

- Two instruments in one compact case
- Two large 8.4" (800 x 480 pixels) colour TFT VGA displays with graphical user interface
- Data transfer and communication via 2 x USB (Type A and B) or 1 x ETHERNET
- Data storage on removable Compact Flash memory card
- Independent sets of clamp-on CTs allow service, calibration or later purchase of clamp-on CTs without factory return of the device.

Measurement Inputs

- 3 voltage inputs U1, U2, U3
- 3 direct current inputs I1, I2, I3
- 2 universal clamp-on CT current inputs for I1, I2, I3

WORKING STANDARD - Functions

- Meter testing of pulse outputs (LED/disc mark/S0) and registers of active, reactive, apparent 1- or 3-phase, 3- or 4-wire energy meters with 3 pulse inputs and 3 pulse outputs
- Measurement of electrical parameters (UI φ , PQS, f, PF) including vector diagram, harmonic analysis and wave form display.
- Instrument transformer testing (CT/PT burden, CT/PT ratio)

POWER QUALITY ANALYZER - Functions

- Dips / Swells / Interruptions
- Harmonics / Interharmonics / Signal voltages
- Voltage unbalance
- Flicker
- Transient capture $\geq 100\mu\text{s}$ (22.7 kHz)

Options

- Software CALegration
- GPS Time Synchronisation (integrated, order with instrument)
- Set of 3 clamp-on CT 100A (active error compensated)
- Set of 3 clamp-on CT 1000A
- Set of 3 flexible current probes FLEX 3000 (30/300/3000A)
- 3-phase adapter set for AmpLiteWire
- Primary current sensor AmpLiteWire 2000 A
- 3-phase adapter set for VoltLiteWire
- Primary voltage sensor VoltLiteWire 40 kV

Technical Data PRS 600.3

General

Auxiliary supply:	88VAC _{min} ... 264 VAC _{max}
Power consumption:	max. 85 VA
Housing:	Hard Plastic with rubber protection
Dimensions:	W 510 x H 182.5 x D 227.5 mm
Weight:	approx. 10 kg
Operation temperature:	-10 °C ... +50 °C
Storage temperature:	-20 °C ... +60 °C
Relative humidity:	≤ 85% at Ta ≤ 21°C ≤ 95% at Ta ≤ 25°C, 30 days / year spread

Safety

Isolation protection:	IEC 61010-1:2002
Measurement Category:	300V CAT IV, 600V CAT III
Degree of protection:	IP-40

Measurement Range

Measuring Quantity	Range	Input / Sensor
Voltage (phase - neutral)	5 V ... 520 V	U1, U2, U3
	10 mV ... 5 V	U1 (Burden)
Current	1 mA ... 12 A	12 A (I1, I2, I3)
	10 mA ... 120 A	120 A (I1, I2, I3)
	10 mA ... 100 A	Clamp-on CT 100A
	100 mA ... 1000 A	Clamp-on CT 1000A
	3 A ... 3000 A	FLEX 3000
Primary current	30 A ... 2000 A	AmpLiteWire 2000A
Primary voltage	500 V ... 40 kV	VoltLiteWire 40kV

PORTABLE REFERENCE STANDARD

Measurement Accuracy

Measuring Quantity	Range	≤ ± E [%] ^{1 2 4 6}
Voltage / Current		Cl. 0.02
Voltage (U1, U2, U3, N)	30 V ... 520 V	0.01
	5 V ... 30 V	0.02
Current direct up to 12 A	60 mA ... 12 A	0.01
	6 mA ... 60 mA	0.02
	1 mA ... 6 mA	0.02
Current direct up to 120 A	600 mA ... 120 A	0.01
	60 mA ... 600 mA	0.02
	10 mA ... 60 mA	0.02
Current clamp-on CT 100A	100 mA ... 100 A	0.2
	10 mA ... 100 mA	0.2
Current clamp-on CT 1000A	20 A ... 1000 A	0.2
	1 A ... 20 A	1.0
Current FLEX 3000	300 A ... 3000 A	0.1 + E _M
	30 A ... 300 A	
	3 A ... 30 A	
Burden Voltage (U1)	100 mV ... 5 V	0.1
	10 mV ... 100 mV	0.1
Current AmpLiteWire 2000A	300 A ... 2000 A	0.1 + E _M
	30 A ... 300 A	0.1 + E _M
Voltage VoltLiteWire 40kV	10 kV ... 40 kV	0.1 + E _M
Drift / year		≤ ± E [%] ^{1 2 5 6}
Measuring Quantity	Range	
Voltage (U-N)	30 V ... 520 V	0.004
Current direct up to 12 A	60 mA ... 12 A	0.004
Current direct up to 120 A	600 mA ... 120 A	0.004

Measuring quantity / Input I	Range	≤ ± E [%] ^{1 2 3 6}
Power / Energy	Voltage: 30 V ... 520 V (U - N)	
		Cl. 0.02
Active (P), Apparent (S) and Reactive (Q) Power / Energy		
Direct 12 A (I1, I2, I3)	60 mA ... 12 A	0.015
	6 mA ... 60 mA	0.02
	1 mA ... 6 mA	0.02
Direct 120 A (I1, I2, I3)	600 mA ... 120 A	0.015
	60 mA ... 600 mA	0.02
	1 mA ... 60 mA	0.02
Clamp-on CT 100A	100 mA ... 100 A	0.2
	10 mA ... 100 mA	1.0
Clamp-on CT 1000A	20 A ... 1000 A	0.2
	1 A ... 20 A	1.0
Drift / year		≤ ± E [%] ^{1 2 3 5 6}
Measuring Quantity	Range	
Power / Energy (PQS)	I direct	0.008

Temperature coefficient (TC):	Range	≤ ± TC [%/°C] ³
	-10° C ... +15°C	0.0015
	+35° C ... +50°C	0.0015

Measuring Quantity	Range	≤ ± E
Frequency / Phase Angle / Power Factor		
Frequency (f)	40 Hz ... 70 Hz	0.01 Hz
Phase Angle (φ)	0.00 ° ... 359.99°	0.01°
Power Factor (PF)	-1.000 ... +1.000	0.0002

CT/PT Ratio	≤ ± E [%] ^{1 2}
Ratio error E: Sum of errors of inputs used for primary (IP, UP) and secondary (IS, US) measurements.	E _P + E _S

CT/PT Burden	≤ ± E [%] ^{1 2}
Operating burden S_n: Sum of errors of inputs used for voltage (U) and current (I) measurement.	E _U + E _I

Notes

- x.x : Related to the measuring value (at power / energy PF ≥ 0.5)
- x.x : Related to the measuring range final value (full scale, FS), E(M) = FS/M * x.x (e.g. 0.1 at FS = 10 mA, E(2mA) = 10/2 * 0.1 = 0.5 %)
- Fundamental frequency in the range 45 ... 66 Hz
- S: x.x, P, Q: x.x / PF (PF < 0.5, related to apparent power), 3- and 4-wire networks
- E_M: Accuracy specified by manufacturer of clamp-on CT or sensor
- Typical values, determined on the basis of monthly calibrations and calculated by least square method
- Valid in temperature range: +15°C ... +35°C

3 Pulse Inputs / outputs

Input level:	4 ... 12 VDC (24 VDC)
Input frequency:	max. 200 kHz
Supply:	12 VDC (I < 60 mA)
Output level:	5V
Pulse length:	≥ 10µs
Meter constant:	C = 70'200'000 / (ln * Un)
Active, Reactive, Apparent [imp/Wh(varh,VAh)]	The meter constant depends on the highest selected internal ranges ln, Un. Example: Un = 520V, ln = 120 A C = 1'125 [imp/Wh(varh,VAh)]
Output frequency:	C' = C / 3'600 [imp/Ws(vars, VAs)] fo = C' * PΣ(QΣ, SΣ) f _{max} = 70'200'000 * 3 * 520 * 120 / (520 * 120 * 3'600) = 58'500 [imp/s]

POWER QUALITY ANALYZER

Voltage	
Inputs	3
Accuracy class	■ 0.1%
Dips / Swells / Interruptions	■ U _{RMS} ½
Harmonics	■ 2 ... 64
Interharmonics	■ 1-2 ... 63-64
Signal Voltages	■ fs < 3 kHz
Flicker P _{st} , P _{it}	■ up to 40 Hz
Unbalance	■
Transients	● 0.9 kV/≥ 100 µs (22.7 kHz)
EN 50160	●
Current	
Inputs	3
Accuracy class	■ 0.1%
Inrush	■
Harmonics	■ 2 ... 64
Interharmonics	■ 1-2 ... 63-64
Transients	● ≥ 100 µs (22.7 kHz)
Power	
Active (P) / Reactive (Q) / Apparent (S)	●
Harmonics P, Q, S	●
Energy	●
Communication	
USB	●
ETHERNET	●
Other functions	
Removable Compact Flash card memory	●
GPS time synchronisation (integrated)	○

Notes

- Function according IEC 61000-4-30 Class A
- Option