


800PL-HD SERIES

Digital DC Hipot Testers – 80kV & 40kV



The 800PL-HD Series Hipot is a modern solution for testing the insulation strength of electrical apparatus. Outfitted with a state-of-the-art digital interface, and extensive safety features, this robust unit ensures simplistic operation, accurate results, and operator safety under all circumstances. The 800PL-HD's heavy-duty design is the perfect solution for tests that require long duty cycle.

The 800PL-HD Series features the most accurate kilovoltmeter readings regardless of load current. Voltage measurements are taken directly at the output of the high voltage transformer, while current is measured at the return leg to ensure the highest accuracy.

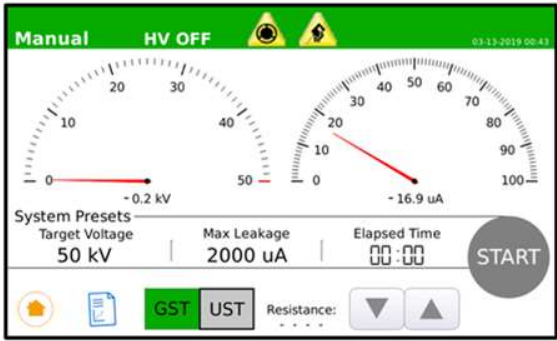

FEATURES

- Tests up to 40kV or 80kV at load current of 10mA
- Portable, rugged design for field use with wheels
- Multiple measurements including output voltage, leakage current, insulation resistance (IR), and polarization index (PI)
- Adjustable test parameters such as target voltage, maximum leakage current, ramp rate, and dwell time
- Record and view test results in the internal memory
- 7" color touchscreen display with adjustable brightness
- Internal discharge solenoid
- HIPODirect Mobile App Compatible: View, Share, Upload test reports to online cloud, and update firmware all through WIFI Direct

BENEFITS

- Simple to Use with minimal amount of setup time and intuitive control panel allows for simple testing
- Sturdy and portable design
- User-friendly touchscreen interface
- Easy to share results via USB transfer
- Safe operation with interlock and emergency stop

APPLICATIONS

Brief Description

- | | |
|---|---|
| <input checked="" type="checkbox"/> Motors | <input checked="" type="checkbox"/> Electrical Switchgears |
| <input checked="" type="checkbox"/> Generators | <input checked="" type="checkbox"/> Vacuum Interrupters |
| <input checked="" type="checkbox"/> Bucket Trucks | <input checked="" type="checkbox"/> Aerial Lift Equipment |
| <input checked="" type="checkbox"/> Transformers | <input checked="" type="checkbox"/> Insulated Electric Apparatus & Components |
| <input checked="" type="checkbox"/> Power Cables | |

TECHNICAL SPECIFICATIONS

Model #		840PL-HD	880PL-HD
System Output	Voltage	0.4 – 40kV	0.4 – 80kV
	Current	10mA	
	Polarity	Negative Output, Positive Ground	
Voltage & Current Measurement Accuracy		± 1.5% of Reading ± 0.2% F.S.	
Voltage Resolution		100V	
Current Resolution		0.1µA	
Insulation Resistance Measurement Range		10kΩ – 40GΩ	
IR Accuracy		±1% of scale	
IR Resolution		10kΩ	
Input		90-264VAC, 45-65Hz, 900VA	
Duty Cycle		1 hour ON / 1 hour OFF	
Dimensions (W x D x H)	Net	20in x 14in x 20in (50cm x 35cm x 51 cm)	
	Shipping	24in x 19in x 23in (61cm x 48cm x 58cm)	
Weight	Net	78lbs (36kg)	
	Shipping	91lbs (42kg)	
Safety Features		Emergency Stop Visual Warning Indicators External Interlock Audible Warning Indicator	Interlock Hand-switch (optional) External Warning Lamp (optional) Interlock Foot Pedal (optional)
Display		7" TFT , 800 x 480, Color Touch Screen	
Interfaces		USB 2.0 for Memory Stick	
Output Data Format		CSV	
Calibration Interval		1 year recommended	
Languages		English, Spanish, Portuguese, French, German, Mandarin	
ECCN: 3A992.A		HTS: 9030.39.0100	

	Electronic Components		High Voltage Components	
	Temperature	Humidity (r.h. non-condensing)	Temperature	Humidity (r.h. non-condensing)
Operation	-10°C ... +50°C	5 ... 95%	-10°C ... +50°C	5 ... 90%
Storage	-20°C ... +70°C	5 ... 95%	-20°C ... +55°C	5 ... 90%

SCOPE OF SUPPLY

- 25ft HV output cable with clamp
- 25ft HV return cable with clamp
- 15ft HV ground with clamp
- 6ft input power cord
- Manual and calibration certificate

STANDARD OPTIONS

- HHDA13-280** – 120kV rated grounding stick
- HH-HS-DI** – Hand operated interlock switch
- HH-FS-DI** – Foot operated interlock switch
- HH-WARN-DI** – Safety Strobe light with magnetic base
- EXT-WARN-1** – One-year extended warranty