


700-DI Series AC Dielectric Test Sets

High Voltage AC Test Systems – 2-100kVA

The HIPOTRONICS standard line of AC Dielectric Test Systems are designed to perform high voltage AC tests on electrical apparatus in accordance with IEC60, IEEE 4 and IEC 270 and other national test standards. A variety of mechanical configurations are available to suit different installation conditions. Some models can be supplied in mobile versions when it is difficult to move the test object to the test area.

AC Dielectric Test Sets are available in a wide range of voltage and power ratings with exceptional reliability, durability and functionality. No matter what your requirement, HIPOTRONICS has an affordably priced, highly reliable test solution to meet your needs.

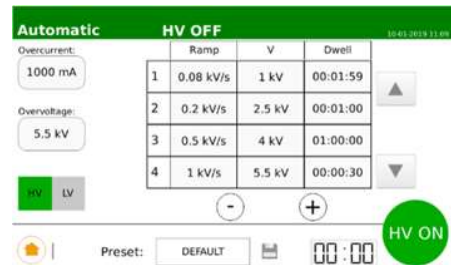

FEATURES

- ☑ **Microprocessor controller** provides better regulation accuracy and measuring accuracy
- ☑ **Continuously adjustable test output voltage**
- ☑ **SIL3 Compatible**
- ☑ **Designed** to operate from 0.5% to 100% (2kVA & 5kVA), or 3.5% to 100% (≥10kVA) of the maximum rated output voltage
- ☑ **Easily accessible** meter recalibration
- ☑ **Adjustable Overload** from 10% to 110% of rated current output
- ☑ **Backup Breaker** overload safety situation
- ☑ **Output Connected** voltmeter and ammeter
- ☑ **Zero start interlock**
- ☑ **Rated current** available from zero to rated voltage
- ☑ **HIPODirect Mobile App Compatible: View, Share, Upload** test reports to online cloud, and update firmware all through WIFI Direct

BENEFITS

- ☑ **Simple to Use** with minimal amount of setup time and intuitive control panel allows for simple testing
- ☑ **Surge-compensated** HV transformer windings for withstanding flashovers at full voltage
- ☑ **Output Connected Meters** ensures for fast and accurate readings
- ☑ **Surge and Transient Protection** on all meters, transformers, etc.
- ☑ **Partial Discharge Testing** allows for low PD levels available at full output voltage (PD level needs to be specified when ordering and may require additional components)

APPLICATIONS

- ☑ Transformers
- ☑ Bushings
- ☑ Connectors
- ☑ Capacitors
- ☑ Switchgear
- ☑ Arrestors
- ☑ Instrument Transformers
- ☑ Sample Cable Lengths
- ☑ Rotating Machines
- ☑ Insulating Materials
- ☑ Transmission Line Hardware
- ☑ HV Components

**Pictures are for reference only and may not reflect final design*

TECHNICAL SPECIFICATIONS

Voltage Output Range	0.5-100% of F.S. (2kVA & 5kVA models), 3.5-100% of F.S. (≥10kVA models)
Voltage & Current Measurement Accuracy	± 1.5% of Reading ± 0.2% F.S
Measurement Resolution	0.01kV, 0.01mA
Ramp Rate Accuracy	+/- 5%
Step Resolution	0.5% of Full Scale
Distortion	Less than 5% at Rated Capacitive Load
PD Baseline	≤20pC up to full voltage for oil insulated transformers

Notes: The PD level is inherent to the equipment itself without considering possible external radiated interference from the customer's dedicated mains power supply or ground noise.

	2kVA Power Rating				
Parameter	705-2	710-2	715-2	730-2	750-2
Input Voltage	90-264VAC, 50/60Hz				
Max Output Voltage	5kV	10kV	15kV	30kV	50kV
Max Output Current	400mA	200mA	133mA	66mA	40mA
Output Connection					
All-in-One Cabinet	Shielded Cable Output			n/a	
Separate Components	Bushing			Epoxy Output Bushing	
Duty Cycle					
All-in-One Cabinet	15min ON / 45min OFF, 6x/day			n/a	
Separate Components	1hr ON / 1hr OFF, 6x/day or Continuous @ 90% rated voltage, and 75% rated current				
Controller Dimensions (W x H x D)					
All-in-One Cabinet	22" x 21" x 26" (546 x 510 x 660mm)			n/a	
Separate Components	16.60" x 7.75" x 20.5" (422 x 197 x 520.7mm)				
Controller Weight (Net)					
All-in-One Cabinet	130lbs (59kg)			n/a	
Separate Components	35lbs (16kg)				
HV Source Dimensions (W x H x D)					
All-in-One Cabinet	In Control / Regulator Section			n/a	
Separate Components	20.50" x 29.25" x 25.0" (521 x 743 x 635mm)			20.50" x 25.00" x 31.00" (521 x 743 x 787mm)	
HV Weight (Net)					
All-in-One Cabinet	In Control / Regulator Section			n/a	
Separate Components	400lbs (181kg)		425lbs (193kg)		450lbs (204kg)

	5kVA Power Rating					
Parameter	705-5	715-5	730-5	775-5	7100-5	
Input Voltage	200-264VAC, 50/60Hz					
Max Output Voltage	5kV	15kV	30kV	75kV	100kV	
Max Output Current	1000mA	333mA	166mA	66mA	50mA	
Output Connection						
All-in-One Cabinet	Shielded Cable Output			n/a		
Separate Components	Epoxy Output Bushing					
Duty Cycle						
All-in-One Cabinet	15min ON / 45min OFF, 6x/day			n/a		
Separate Components	1hr ON / 1hr OFF, 6x/day or Continuous @ 90% rated voltage, and 75% rated current					
Controller Dimensions (W x H x D)						
All-in-One Cabinet	21.5" x 25.5" x 26.0" (546 x 510 x 660mm)			n/a		
Separate Components	16.60" x 7.75" x 20.5" (422 x 197 x 520.7mm)					
Controller Weight (Net)						
All-in-One Cabinet	165lbs (75kg)			n/a		
Separate Components	35lbs (16kg)					
HV Source Dimensions (W x H x D)						
All-in-One Cabinet	In Control / Regulator Section			n/a		
Separate Components	20.50" x 25" x 29.25" (521 x 635 x 743mm)			25" x 34" x 38" (635 x 864 x 965mm)	25" x 37" x 46.5" (635 x 940 x 1181mm)	
HV Weight (Net)						
All-in-One Cabinet	In Control / Regulator Section			n/a		
Separate Components	425lbs (193kb)	450lbs (205kg)	500lbs (227kg)	660lbs (299kg)	860lbs (390kg)	

	10kVA Power Rating				
Parameter	705-10	715-10	730-10	775-10	7100-10
Input Voltage	230V, 50/60Hz. Other Inputs Available. Consult Factory.				
Max Output Voltage	5kV	15kV	30kV	75kV	100kV
Max Output Current	2000mA	666mA	333mA	133mA	100mA
Output Connection	Shielded Cable Output		Epoxy Output Bushing		
Duty Cycle	1hr ON / 1hr OFF, 6x/day or Continuous @ 90% rated voltage, and 75% rated current				
Controller Dimensions (W x H x D)	22.75" x 47" x 26.25" (578 x 1194 x 667mm)				
Controller Weight (Net)	600lbs (272kg)		400lbs (181kg)		
HV Source Dimensions (W x H x D)	In Control / Regulator Section	20.50" x 25" x 29.25" (521 x 635 x 743mm)		25" x 37" x 40" (635 x 940 x 1016mm)	25" x 37" x 47" (635 x 940 x 1193mm)
HV Weight (Net)	In Control / Regulator Section	500lbs (227kg)		860lbs (390kg)	900lbs (408kg)

	20kVA Power Rating				
Parameter	705-20	715-20	730-20	775-20	7100-20
Input Voltage	480V, single phase, 60Hz; 380V, single phase, 50Hz. Other Inputs Available. Consult Factory.				
Max Output Voltage	5kV	15kV	30kV	75kV	100kV
Max Output Current	4000mA	1333mA	666mA	266mA	200mA
Output Connection	Shielded Cable Output		Epoxy Output Bushing		
Duty Cycle	1hr ON / 1hr OFF, 6x/day or Continuous @ 90% rated voltage, and 75% rated current				
Controller Dimensions (W x H x D)	25" x 54" x 30" (635 x 1372 x 762mm)				
Controller Weight (Net)	700lbs (318kg)		300lbs (136kg)		
HV Source Dimensions (W x H x D)	In Control / Regulator Section	25" x 38" x 37" (635 x 965 x 940mm)		25" x 37" x 40" (635 x 940 x 1016mm)	25" x 37" x 47" (635 x 940 x 1194mm)
HV Weight (Net)	In Control / Regulator Section	900lbs (409kg)		950lbs (432kg)	1300lbs (591kg)

	40kVA Power Rating				
Parameter	705-40	715-40	720-40	750-40	7100-40
Input Voltage	480V, single phase, 60Hz; 380V, single phase, 50Hz. Other Inputs Available. Consult Factory.				
Max Output Voltage	5kV	15kV	20kV	50kV	100kV
Max Output Current	8000mA	2666mA	2000mA	800mA	400mA
Output Connection	Shielded Cable Output		Epoxy Output Bushing		
Duty Cycle	1hr ON / 1hr OFF, 6x/day or Continuous @ 90% rated voltage, and 75% rated current				
Controller Dimensions (W x H x D)	30" x 75" x 48" (762 x 1905 x 1219mm)		30.25" x 60" x 31" (768 x 1524 x 787mm)		
Controller Weight (Net)	1400lbs (635kg)		450lbs (204kg)		
HV Source Dimensions (W x H x D)	In Control / Regulator Section	25" x 37" x 38" (635 x 940 x 965mm)			30.5" x 40" x 55.5" (775 x 1016 x 1410mm)
HV Weight (Net)	In Control / Regulator Section	925lbs (420kg)		Net 1450lbs (658kg)	1800lbs (816kg)

	60kVA Power Rating			
Parameter	705-60	720-60	760-60	7100-60
Input Voltage	480V, single phase, 60Hz; 380V, single phase, 50Hz. Other Inputs Available. Consult Factory.			
Max Output Voltage	5kV	20kV	60kV	100kV
Max Output Current	12000mA	3000mA	1000mA	600mA
Output Connection	Shielded Cable Output		Epoxy Output Bushing	
Duty Cycle	1hr ON / 1hr OFF, 6x/day or Continuous @ 90% rated voltage, and 75% rated current			
Controller Dimensions (W x H x D)	30" x 75" x 48" (762 x 1905 x 1219mm)		30.25" x 75" x 31" (768 x 1905 x 787mm)	
Controller Weight (Net)	1800lbs (816kg)		800lbs (363kg)	
HV Source Dimensions (W x H x D)	In Control / Regulator Section	30.5" x 38" x 41" (775 x 965 x 1041mm)	30.5" x 40" x 46" (775 x 1016 x 1168mm)	36.5" x 48" x 55.5" (927 x 1219 x 1410mm)
HV Weight (Net)	In Control / Regulator Section	1400lbs (635 kg)	1925lbs (873 kg)	2600lbs (11795 kg)

	100kVA Power Rating			
Parameter	720-100	750-100	775-100	7100-100
Input Voltage	480V, single phase, 60Hz; 380V, single phase, 50Hz. Other Inputs Available. Consult Factory.			
Max Output Voltage	20kV AC	50kV AC	75kV AC	100kV AC
Max Output Current	5000mA	2000mA	1333mA	1000mA
Output Connection	Epoxy Output Bushing			
Duty Cycle	1hr ON / 1hr OFF, 6x/day or Continuous @ 90% rated voltage, and 75% rated current			
Controller Dimensions (W x H x D)	30" x 73.5" x 48" (762 x 1867 x 1219mm)			
Controller Weight (Net)	1400lbs (636 kg)			
HV Source Dimensions (W x H x D)	30" x 39" x 40" (762 x 991 x 1016mm)	30" x 40" x 40" (762 x 1016 x 1016mm)	30" x 50" x 57.5" 762 x 1270x 1461mm	34" x 45" x 58" 864 x 1143 x 1473mm
HV Weight (Net)	2600lbs (1182 kg)	2800lbs (1273 kg)	2900lbs (1315 kg)	3100lbs (1409 kg)

Note: Dimensions and weights are approximate and are subject to change.

** Other output ratings available; consult factory with your requirements.*

	Electronic Devices		High Voltage Equipment	
	Temperature	Humidity (r.h. non-condensing)	Temperature	Humidity (r.h. non-condensing)
Operation	+5°C ... +40°C	5...95%	-10°C ... +45°C	5...90%
Storage	-20°C ... +70°C	5...95%	-10°C ... +55°C	5...90%

ECCN	3A992.A
HTS US	9030.39.0100

SCOPE OF SUPPLY

Embedded controller
Regulator
HV transformer
HV warning lamp
Manual, test report, and calibration certificate

CUSTOMER SUPPLIED

Input & output regulator power cables
High voltage output connection to test object
Grounding materials

STANDARD OPTIONS

HHDA13-280 – 120kV rated grounding stick
CF – ≤2pC PD specification
DI-REM-SFTW – Remote control Software with external E-stop button
Galvanic Control (GC) – Fiber optic connection to customer supplied computer, 10m
Galvanic E-stop (GE) – GC with remote E-stop button with fiber optic connection, 10m
DI-FO-X – Extra fiber optic cable (20, 30, 50m)
GND Braid – Grounding material
HH-700-HS – Hand operated interlock switch
HH-700-FS – Foot operated interlock switch
Castors – Set of casters for regulator & HV tank (if applicable)